

Micro-Capacity Thermostatic Expansion Valves for Refrigeration


EF Series



Sporlan's expanded **EF Series Thermostatic Expansion Valves** feature micro-capacities that are ideal for food service or food retail applications where the cooling capacity is significantly smaller than 1 ton. Featuring nominal tonnage capacities of 1/10 and 1/16 tons, these new valves precisely control superheat in high efficiency refrigeration cases or reach-ins where the use of LED lights, improved insulation and doors, and smaller anti-sweat heaters lead to reduced load.

Features & Benefits

- New 1/10 and 1/16 ton Nominal Capacities for Micro-system Optimization
- Works with All Common Refrigeration Refrigerants
- Unique Design Minimizes Solid Debris Build-up
- Internal or External Equalization
- Field Replaceable Power Element for Easy Retrofit
- Selective Thermostatic Charges for Application Optimization
- Easily Adjustable Superheat Setting
- Long Lasting, Durable Stainless Steel Diaphragm and Weld Design
- High-Strength Silver Soldered Joints with Solid Copper Fittings
- Multiple Capillary Tube Lengths Available

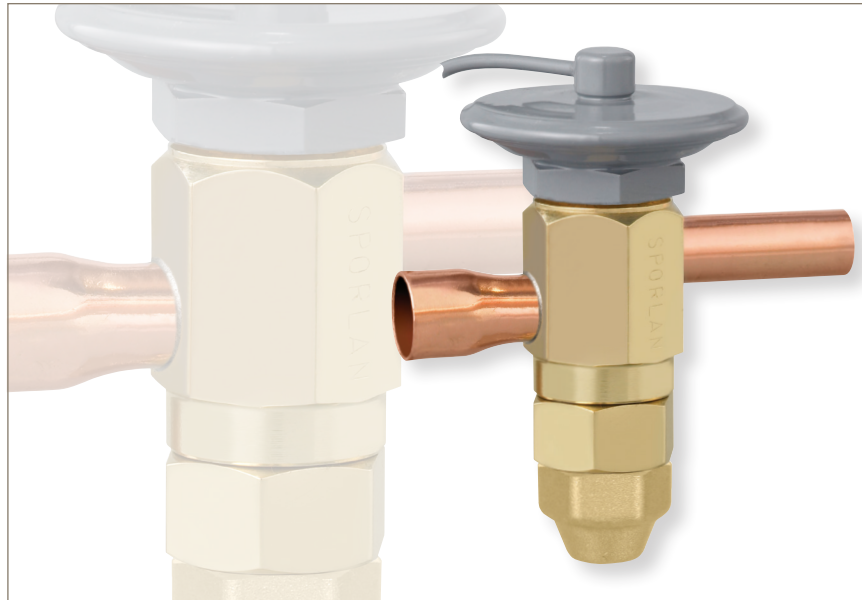

Save Hours of Design and Development Time Reduce Project Timelines

- Quickly and easily optimize expansion for enhanced evaporator efficiency
- Gain energy efficiency to meet pending regulations
- Minimize cost and refrigerant charge with reduced evaporator size
- Ease the transition to low GWP or natural refrigerants

The micro-capacity EF Series TEV modulates allowing it to maintain target superheat under varying loads and conditions while capillary tubing does not. The resulting coil efficiency gain and reduced coil size assists with meeting refrigerant charge restrictions when using flammable refrigerants like propane (R-290). OEM tested and approved, the micro-capacity EF Series can make your next project run as efficiently as your systems.



ENGINEERING YOUR SUCCESS.

Specifications

Refrigerants	R-134a, R-290, R-404A/507, R-448A, R-449A, R-513A
Lubricants	Mineral Oil, Polyolester (POE), Polyvinylether (PVE)
Maximum Rated Pressure	500 psig (34.5 bar)

Nominal Capacities

Tons (kW)

R-134a, R-513A	R-290, R-407A/F, R-448A, R449A	R-404A, R-507
1/20 (0.18)	1/16 (0.21)	1/25 (0.14)
1/12 (0.29)	1/10 (0.35)	1/16 (0.21)

Nomenclature and Standard Connections / Options

EF	D	E	1/16	C	2 x 3 x 2 ODF	15"
Series	Refrigerant	Options	Tonnage	Charge	Fittings	Capillary
	D – R-448A, R-449A	None =	See Nominal	C	Inlet x Outlet x Equalizer	Tube
	J – R-134a, R-513A	Internally Equalized	Capacities	Z	in 1/8 inches	Length
	N – R-407A, R-407F	E =	in table at		ODF	15"
	O – R-290	Externally Equalized	above right		Inlet: 1/4", 3/8"	30"
	S – R-404A	(1/4" ODF Std.)			Outlet: 3/8", 1/2"	60"

Extended Capacities

R-404A - Tons (kW)

Nominal Capacity	Evaporator Temperature °F (°C)					
	40 (4)	20 (-7)	0 (-18)	-10 (-23)	-20 (-29)	-40 (-40)
1/25	0.033 (0.12)	0.035 (0.12)	0.03 (0.11)	0.025 (0.09)	0.022 (0.08)	0.015 (0.05)
1/16	0.069 (0.24)	0.073 (0.26)	0.062 (0.22)	0.051 (0.18)	0.045 (0.16)	0.032 (0.11)

R-404A - BTU

Nominal Capacity	Evaporator Temperature °F					
	40	20	0	-10	-20	-40
1/25	396	420	360	300	264	180
1/16	828	876	744	612	540	384

R-290 - Tons (kW)

Nominal Capacity	Evaporator Temperature °F (°C)					
	40 (4)	20 (-7)	0 (-18)	-10 (-23)	-20 (-29)	-40 (-40)
1/16	0.065 (0.23)	0.069 (0.24)	0.06 (0.21)	0.049 (0.17)	0.043 (0.15)	0.032 (0.11)
1/10	0.135 (0.47)	0.144 (0.51)	0.123 (0.43)	0.101 (0.35)	0.09 (0.32)	0.065 (0.23)

R-290 - BTU

Nominal Capacity	Evaporator Temperature °F					
	40	20	0	-10	-20	-40
1/16	780	828	720	588	516	384
1/10	1620	1728	1476	1212	1080	780

R-407A - Tons (kW)

Nominal Capacity	Evaporator Temperature °F (°C)					
	40 (4)	20 (-7)	0 (-18)	-10 (-23)	-20 (-29)	-40 (-40)
1/16	0.05 (0.18)	0.054 (0.19)	0.047 (0.16)	0.038 (0.13)	0.034 (0.12)	0.025 (0.09)
1/10	0.104 (0.37)	0.112 (0.39)	0.096 (0.34)	0.079 (0.28)	0.07 (0.25)	0.052 (0.18)

R-407A - BTU

Nominal Capacity	Evaporator Temperature °F					
	40	20	0	-10	-20	-40
1/16	600	648	564	456	408	300
1/10	1248	1344	1152	948	840	624

R-407F - Tons (kW)

Nominal Capacity	Evaporator Temperature °F (°C)					
	40 (4)	20 (-7)	0 (-18)	-10 (-23)	-20 (-29)	-40 (-40)
1/16	0.055 (0.19)	0.06 (0.21)	0.052 (0.18)	0.043 (0.15)	0.038 (0.13)	0.028 (0.10)
1/10	0.114 (0.40)	0.124 (0.44)	0.107 (0.38)	0.089 (0.31)	0.079 (0.28)	0.058 (0.20)

R-407F - BTU

Nominal Capacity	Evaporator Temperature °F					
	40	20	0	-10	-20	-40
1/16	660	720	624	516	456	336
1/10	1368	1488	1284	1068	948	696

Extended Capacities (Continued)

R-448A - Tons (kW)

Nominal Capacity	Evaporator Temperature °F (°C)					
	40 (4)	20 (-7)	0 (-18)	-10 (-23)	-20 (-29)	-40 (-40)
1/16	0.045 (0.16)	0.048 (0.17)	0.042 (0.15)	0.034 (0.12)	0.03 (0.11)	0.022 (0.08)
1/10	0.093 (0.33)	0.1 (0.35)	0.086 (0.30)	0.071 (0.25)	0.063 (0.22)	0.046 (0.16)

R-449A - Tons (kW)

Nominal Capacity	Evaporator Temperature °F (°C)					
	40 (4)	20 (-7)	0 (-18)	-10 (-23)	-20 (-29)	-40 (-40)
1/16	0.044 (0.15)	0.048 (0.17)	0.041 (0.14)	0.034 (0.12)	0.03 (0.11)	0.022 (0.08)
1/10	0.092 (0.32)	0.099 (0.35)	0.085 (0.30)	0.07 (0.25)	0.062 (0.22)	0.045 (0.16)

R-134a - Tons (kW)

Nominal Capacity	Evaporator Temperature °F (°C)					
	40 (4)	20 (-7)	0 (-18)	-10 (-23)	-20 (-29)	-40 (-40)
1/20	0.04 (0.14)	0.045 (0.16)	0.038 (0.13)	0.032 (0.11)	0.028 (0.10)	0.021 (0.07)
1/12	0.084 (0.29)	0.092 (0.32)	0.079 (0.28)	0.066 (0.23)	0.059 (0.21)	0.043 (0.15)

R-513A - Tons (kW)

Nominal Capacity	Evaporator Temperature °F (°C)					
	40 (4)	20 (-7)	0 (-18)	-10 (-23)	-20 (-29)	-40 (-40)
1/20	0.033 (0.12)	0.036 (0.13)	0.031 (0.11)	0.026 (0.09)	0.023 (0.08)	0.016 (0.06)
1/12	0.069 (0.24)	0.075 (0.26)	0.064 (0.22)	0.053 (0.19)	0.047 (0.16)	0.034 (0.12)

R-448A - BTU

Nominal Capacity	Evaporator Temperature °F					
	40	20	0	-10	-20	-40
1/16	540	576	504	408	360	264
1/10	1116	1200	1032	852	756	552

R-449A - BTU

Nominal Capacity	Evaporator Temperature °F					
	40	20	0	-10	-20	-40
1/16	528	576	492	408	360	264
1/10	1104	1188	1020	840	744	540

R-134a - BTU

Nominal Capacity	Evaporator Temperature °F					
	40	20	0	-10	-20	-40
1/20	480	540	456	384	336	252
1/12	1008	1104	948	792	708	516

R-513A - BTU

Nominal Capacity	Evaporator Temperature °F					
	40	20	0	-10	-20	-40
1/20	396	432	372	312	276	192
1/12	828	900	768	636	564	408



⚠ WARNING – USER RESPONSIBILITY

Failure or improper selection or improper use of the products described herein or related items can cause death, personal injury and property damage.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.

The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.

To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.



Parker Hannifin Corporation
Sporlan Division
206 Lange Drive • Washington, MO 63090 USA
phone 636 239 1111
fax 636 239 9130
www.sporlan.com