


ECHOLON TYPE CABLE 2#18, UNSHIELDED,  
7/26 UTP, BELDEN 8461 OR EQUIVALENT.

CABLE 3#18  
FROM TRNASFOMER

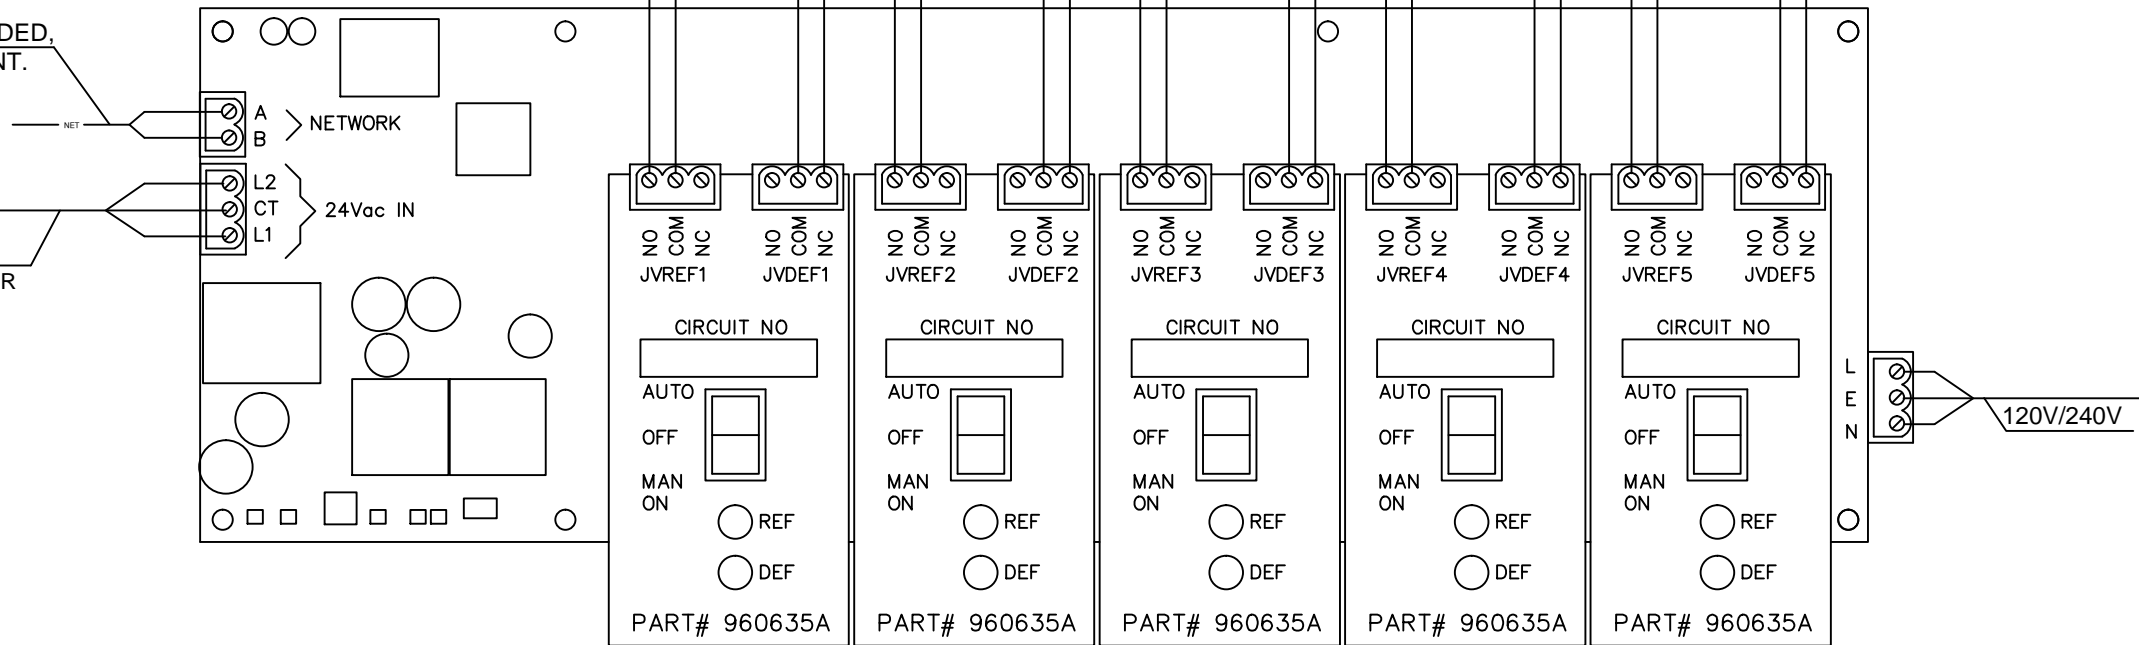

### SPECIFICATIONS

APPLICATIONS	Control of up to (5) refrigeration circuits using hot gas, off time or electric defrost
UNIVERSIAL INPUTS (UI)	None
DIGITAL INPUTS (DI)	None
DIGITAL OUTPUT (DO)	10 Form C Relay Outputs: SPDT, 2A, 250Vac. Protected by on-board fuses
ANALOG OUTPUT (AO)	None
DIMENSIONS	12.5" X 4.0" X 2.25" (318mm x 102mm x42mm)
MOUNTING	Plastic SnapTrak or SB Metal Enclosure
POWER REQUIREMENT	24Vac Center-tap 5.2VA
ENVIRONMENTAL	Operating and Storage: -40 to 75°C (-40 to 168°F), 5 to 95% RH, non-condensing
INSTALLATION TYPE	PART# 950634B: WITHOUT ENCLOSURE PART# 961634B: WITH ENCLOSURE PART# 962634B: ON SNAPTRACK

--	-----	07
--	-----	06
--	-----	05
--	-----	04
--	-----	03
2014-11-13	Update Logo & Adress	02
2011-12-19	Modification on DATA Description	01
DATE	DESCRIPTION	REV.

SYSTEM :  
**REFRIGERATION**

AUTOMATISATION / CONTROL :  
  
Micro Thermo Technologies™  
12855 Rue Brault, Mirabel  
Quebec, Canada, J7J 0C4  
Tel: (450) 668-3033  
Fax: (450) 668-2695

TITLE:  
**MT-CKT  
CIRCUIT CONTROLLER SWLED**

PART# :  
**9XX-634B**

Drawn By : G.Q.	Designed By : L.M.	Approved By : A.H.	Revision : 02
Scale : N.T.S	Date : 2044-08-24	File Name : C-006 MT-CKT-LED	