
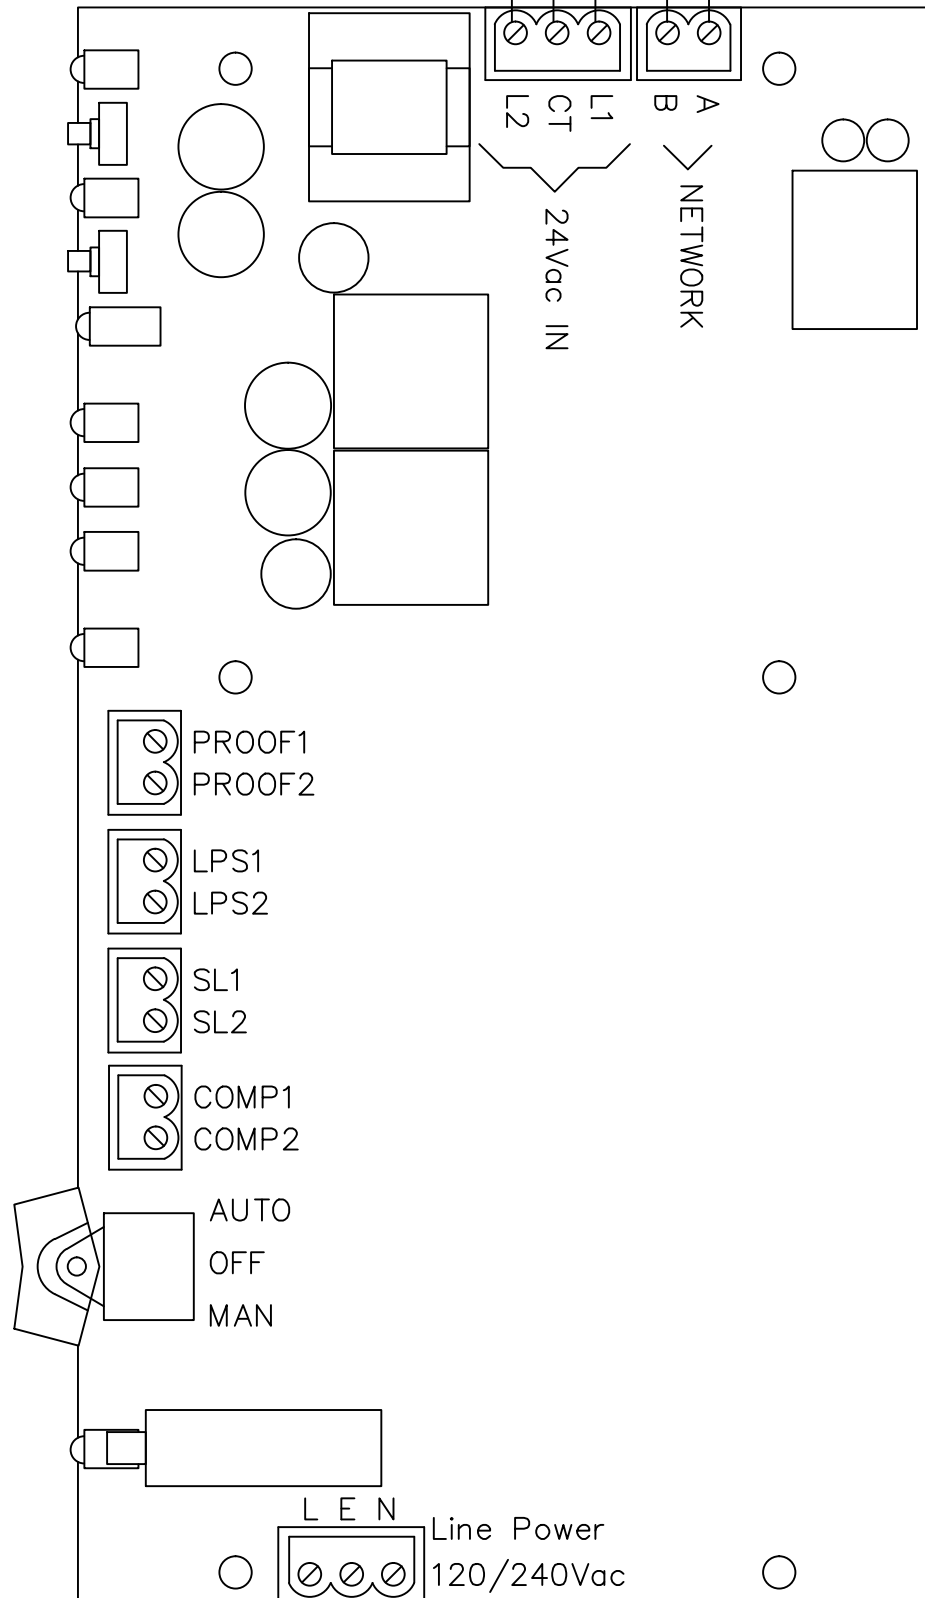


CABLE 3#18  
FROM TRANSFORMER

ECHOLON TYPE CABLE 2#18, UNSHIELDED,  
7/26 UTP, BELDEN 8461 OR EQUIVALENT.

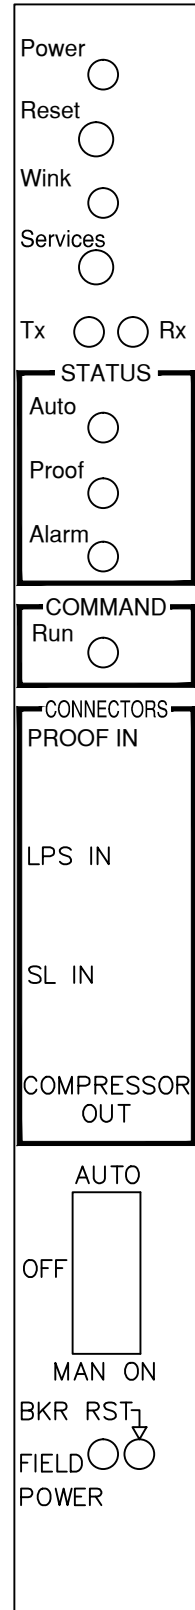

### SPECIFICATIONS

APPLICATIONS	Control of reciprocating, scroll and screw compressors. Support for up to (2) unloaders per compressor
UNIVERSIAL INPUTS (UI)	None
DIGITAL INPUTS (DI)	3 Digital Inputs: (Dry contacts): Low Pressure Switch, Safety Line Switch, Proof of Running Switch
DIGITAL OUTPUT (DO)	2 Form C Relay Outputs: SPDT, 2A, 250Vac. Protected by on-board breakers
ANALOG OUTPUT (AO)	None
DIMENSIONS	7.44" X 4.0" X 1.5"(w/Unloader) (189mm x 102mm x 38mm)
MOUNTING	Panel Mounted Vertically
POWER REQUIREMENT	24Vac Center-tap 1.8VA
ENVIRONMENTAL	Operating: 0 to 51.5°C (32 to 125°F), Storage: 0 to 70°C (32 to 158°F), 5 to 95% RH, non-condensing
INSTALLATION TYPE	PART# 950632F: WITHOUT ENCLOSURE PART# 961632F: WITH ENCLOSURE

--	-----	07
--	-----	06
--	-----	05
--	-----	04
2014-11-13	Update Logo & Adress	03
2013-04-25	Changed operating temperature	02
2011-12-19	Changed description network cable	01
DATE	DESCRIPTION	REV.

SYSTEM :  
**REFRIGERATION**

AUTOMATISATION / CONTROL :



Micro Thermo Technologies™  
12855 Rue Brault, Mirabel  
Quebec, Canada, J7J 0C4  
Tel: (450) 668-3033  
Fax: (450) 668-2695

TITLE:  
**MT-CMP COMPRESSOR  
CONTROLLER**

PART# :  
**9XX-632F**

Drawn By : G.Q.	Designed By : L.M.	Approved By : A.H.	Revision : 03
Scale : N.T.S	Date : 2004-08-24	File Name : C-008 MT-COMP	

FACE PLATE

**MT-CMP**