



ECHELON TYPE CABLE 2#18, UNSHIELDED,
7/26 UTP, BELDEN 8461 OR EQUIVALENT.


CABLE 3#18
FROM TRANSFORMER

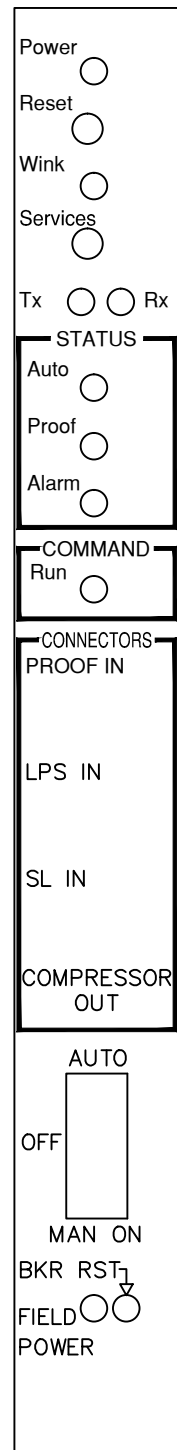

FACE PLATE

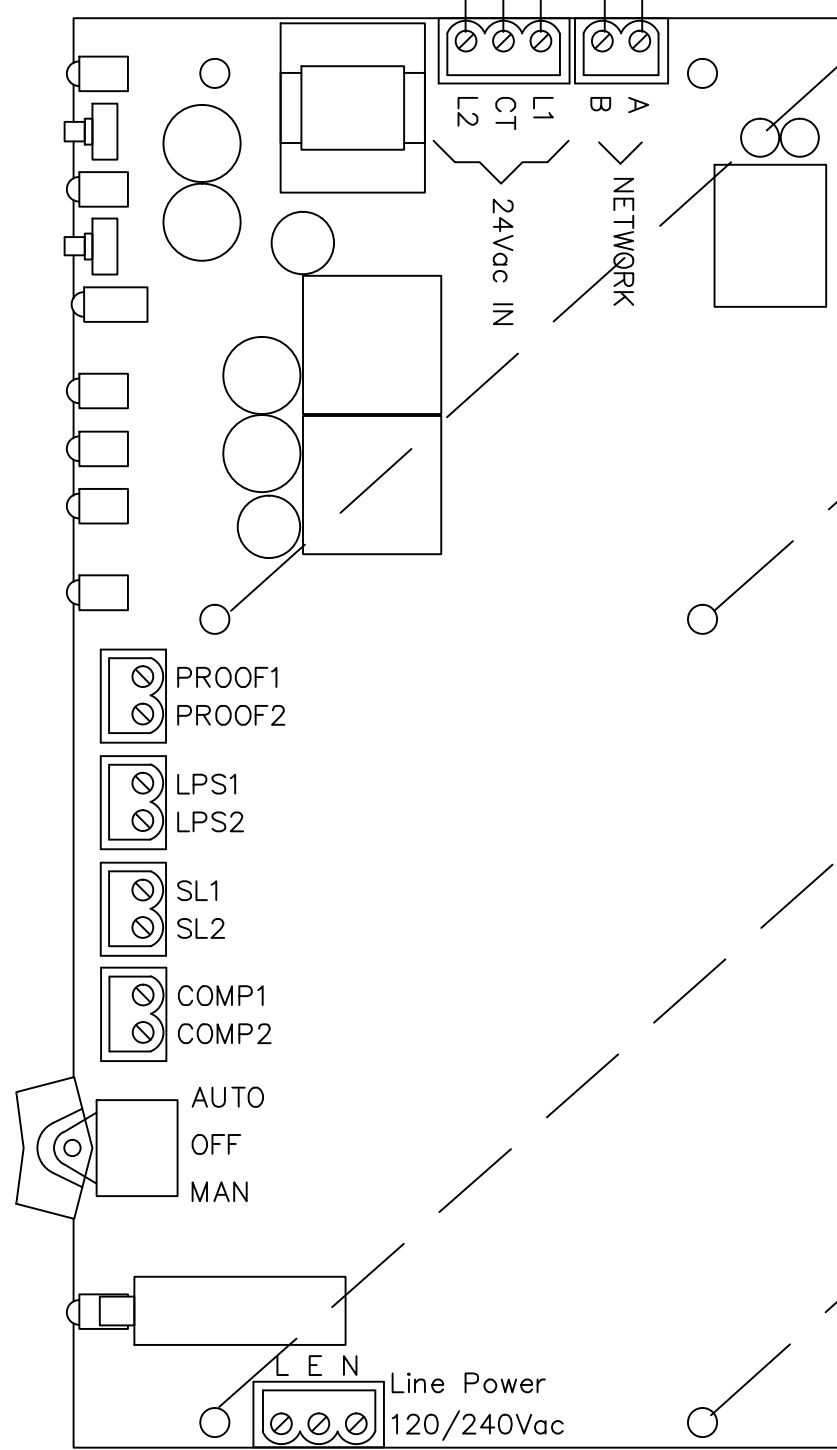

MT-CMP

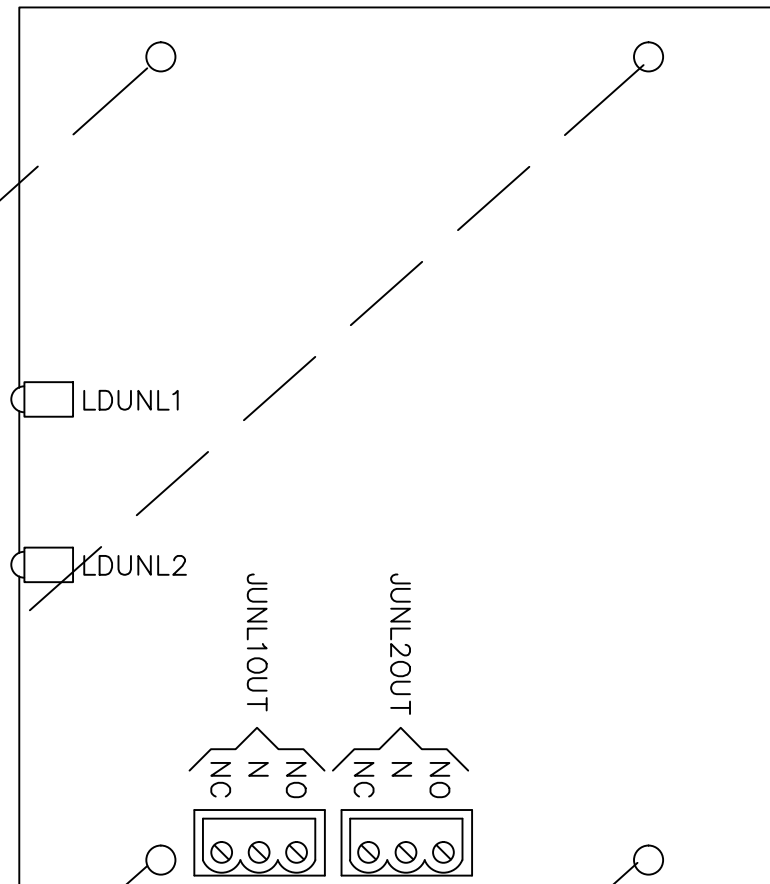

MT-UNLOADER

SPECIFICATIONS

APPLICATIONS	Control of reciprocating, scroll and screw compressors. Support for up to (2) unloaders per compressor
UNIVERSAL INPUTS (UI)	None
DIGITAL INPUTS (DI)	3 Digital Inputs: (Dry contacts): Low Pressure Switch, Safety Line Switch, Proof of Running Switch
DIGITAL OUTPUT (DO)	2 Form C Relay Outputs: SPDT, 2A, 250Vac. Protected by on-board breakers
ANALOG OUTPUT (AO)	None
DIMENSIONS	7.44" X 4.0" X 1.5"(w/Unloader) (189mm x 102mm x38mm)
MOUNTING	Panel Mounted Vertically
POWER REQUIREMENT	24Vac Center-tap 1.8VA
ENVIRONMENTAL	Operating and Storage: -40 to 75°C (-40 to 168°F), 5 to 95% RH, non-condensing

--	----	07
--	----	06
--	----	05
--	----	04
--	----	03
2014-11-13	Update Logo & Adress	02
2011-12-19	Modification on DATA Description	01
DATE	DESCRIPTION	REV.

SYSTEM :
REFRIGERATION

AUTOMATISATION / CONTROL :



Micro Thermo Technologies™
12855 Rue Brault, Mirabel
Quebec, Canada, J7J 0C4
Tel: (450) 668-3033
Fax: (450) 668-2695

TITLE:
**MT-CMP WITH
MT-UNLOADER**

PART# :
961-632F, 950-631A

Drawn By : G.Q.	Designed By : L.M.	Approved By : A.H.	Revision : 02
Scale : N.T.S	Date : 2004-08-24	File Name : C-009 MT-CMP-UNLD	