



PSPT Series


PRESSURE TRANSDUCER REFERENCE GUIDE
SD-362 / 42017




Pressure Transducer Nomenclature

PSPT	0150	S	V	S	P	-	S	K
	RANGE	TYPE	SIGNAL	HARDWARE	CONNECTOR	CABLE	MATERIAL	OPTIONS
PARKER SPORLAN PRESSURE TRANSDUCER	0000 = NA 0150 = 0-150 0300 = 0-300 0500 = 0-500 0652 = 0-652 2000 = 0-2000	0 = NA S = Sealed G = Gauge A = Absolute	0 = NA V = .5 -to 4.5 VR	C = Cable S = 1/4" SAE N = 1/8" NPT	P = Packard	- = None 20 = 2 m 50 = 5 m	Blank = None S = Stainless	Blank = None K = Kit *

Dimensions

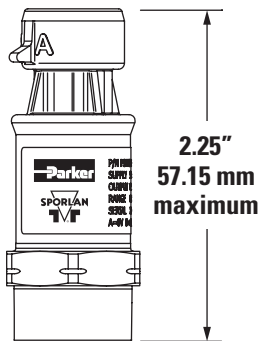

PRESSURE TRANSDUCER

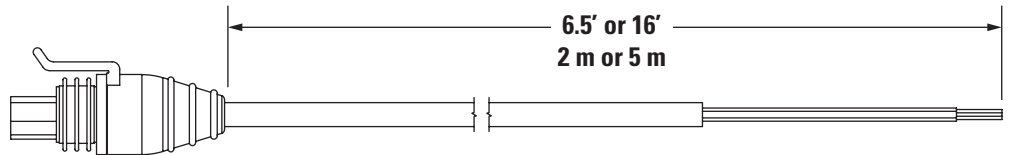

TRANSDUCER CABLE

PARKER SPORLAN PRESSURE TRANSDUCERS (Partial List)			
DESCRIPTION	ITEM	NOTES	LABEL COLOR
PSPT0150SVSP-S	952572	0-150 psis (10 bar) transducer (all other refrigerants)	Green
PSPT0300SVSP-S	952574	0-300 psis (21 bar) transducer (R410A)	Silver
PSPT0500SVSP-S	952576	0-500 psis (34 bar) transducer (R744)	Yellow
PSPT0652SVSP-S	952579	0-652 psis (45 bar) transducer	Pink
TRANSDUCER CABLES			
DESCRIPTION	ITEM	NOTES	
PSPT000000CP20	953192	6.5' (2 meter) cable	
PSPT000000CP50	953100	16' (5 meter) cable	

* Transducer kits include a transducer and a cable. Contact Sporlan for availability.

